



ANSI 150 GLOBE VALVE

Cast Stainless Steel and Cast Steel, Class 150,
Outside screw and yoke, Rising stem, Swivel disc,
Bolted bonnet, Integral seats, Reneable gland packing

Face to Face Dimensions : ANSI B16.10
End Flange Dimensions : ANSI B16.5 RF
Shell Wall Thickness : ANSI B16.34
Valve available with BS4504/10, or /16 Flanges
Pressure Temperature Ratings : ANSI B16.34

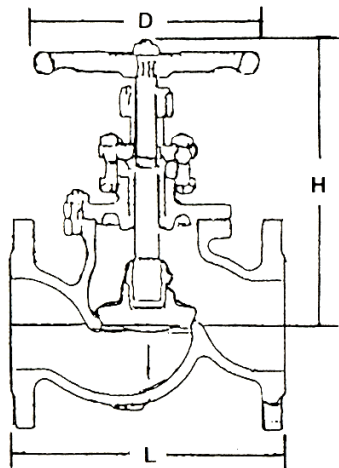
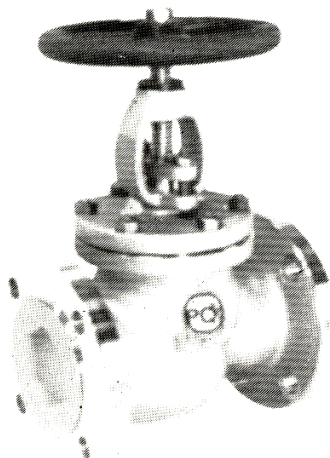


FIG.	PQ-SSGL-150	PQ-CSGL-150
Shell Material	CF8M	WCB

MATERIAL OF PARTS		
FIG.	PQ-SSGL-150	PQ-CSGL-150
Parts Name	Material	
Body	CF8M	ASTM A216 WCB
Bonnet	CF8M	ASTM A216 WCB
Stem	SS316	SS410
Disc	CF8M	CF8
Gland	SS 316	ASTM A216 WCB
Gland Packing	PTFE	GRAPHITE
Gland Flange	CF8M	ASTM A216 WCB
Handwheel	DUCTILE IRON	
Gasket	PTFE	ASBESTOS
Bonnet Bolt/Nut	SS 304	STEEL
Gland Bolt/Nut	SS 304	STEEL
Yoke	CF8M	ASTM A216 WCB
Yoke Sleeve	BRONZE	BRONZE
Seat integral	CF8M	CF8

DIMENSIONS												
VALVE SIZE	mm	15	20	25	40	50	65	80	100	125	150	200
L FACE TO FACE	mm	108	117	127	165	203	216	241	292	356	406	495
H VALVE OPEN HEIGHT	mm	168	168	173	200	230	243	286	325	380	445	545
D DIAM. HANDWHEEL	mm	90	90	100	140	160	180	200	225	250	300	350

127 Lemmer Road, Vulcania Ext. 2, Brakpan, RSA
PO Box 10270 Dalview 1544.
Phone No. : +27 11 736 4994 Fax: +27 11 736 6130
Email: pleixquip@pleixquip.co.za
Website: www.pleixquip.co.za