



PLEIX-QUIP




Africa (Pty) Ltd

800lb CHECK VALVE

Forged Steel, Bolted & Welded Cap, Screwed or S.W. Ends

CONVENTIONAL & FULL PORT

Piston:

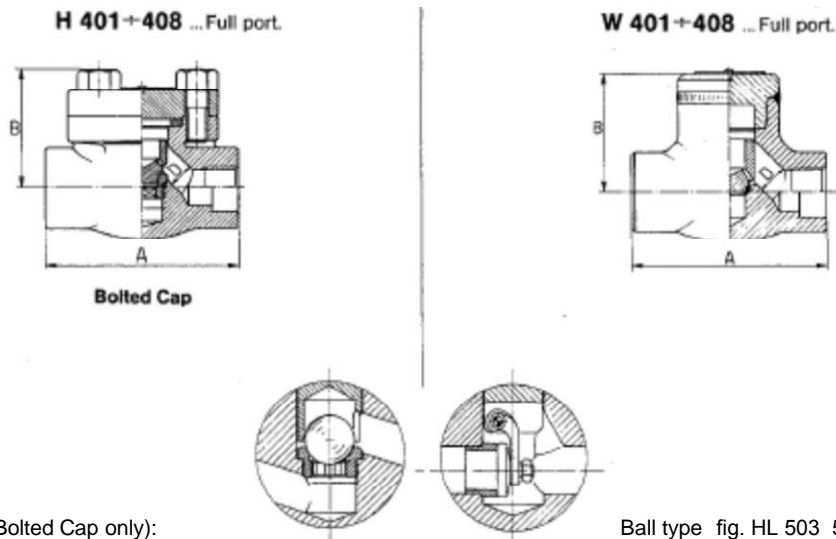

Available on request (for Bolted Cap only):

Swing type fig. HL 604 – 608 ... Conv port
Fig. H 603 – 608 ... Full port

Ball type fig. HL 503 508 Conv. port
Fig. H501 – 508 ... Full port

Valves conform to API Standard 602 as far as applicable

VALVE DIMENSIONS

		¼		⅜		½		¾		1		1¼		1½		2		
CONVENTIONAL PORT	BOLTED	A End to end	-	-	80	3½	90	3½	110	4%	-	150	5%	180	7%			
		D Seat port dia.	-	-	9	0.4	13	0.5	18	0.7	-	30	1.2	35	1.4			
		B Centre to top	-	-	54	2½	59	2¾	76	3	-	90	3½	106	4%			
		Approximate weight - kg	-	-	1.3	1.5	2.8	-	5.6	8.9								
		Fig.N	-	-	HL 403	HL404	HL405	-	HL 407	HL 408								
	WELDED	B Centre to top	-	-	54	2¼	60	2%	76	3	-	92	3%	110	4%			
	Approximate weight - kg	-	-	0.9	1.1	2.2	-	4.9	8.5									
	Fig.N	-	-	WL 403	WL 404	WL 405	-	WL 407	WL 408									
FULL PORT	WELDED	A End to end	80	3%	80	3%	90	3½	110	4%	127	5	150	7	180	7¼	210	8¼
		D Seat port dia.	7	0.3	9	0.4	13	0.5	18	0.7	23	0.9	30	1.4	35	1.4	45	1.8
		B Centre to top	54	2½	54	2½	59	2%	76	3	86	3%	90	4	106	4¼	142	5¼
		Approximate weight - kg	1.3	1.3	1.6	2.9	4.3	5.6	9.4	15.8								
		Fig.N	H 401	H 402	H 403	H 404	H 405	H 406	H 407	H 408								
	BOLTED	B Centre to top	54	2½	54	2½	80	2%	76	3	86	3%	92	3½	110	4%	150	5%
	Approximate weight - kg	1.0	1.0	1.1	2.3	3.2	4.9	8.6	13.7									
	Fig.N	W 401	W 402	W 403	W 404	W 405	W 406	W 407	W 408									

127 Lemmer Road, Vulcania Ext. 2, Brakpan, RSA
 PO Box 10270 Dalview 1544.
 Phone No. : +27 11 736 4994 Fax: +27 11 736 6130
 Email: pleixquip@pleixquip.co.za
 Website: www.pleixquip.co.za